



Product Catalog

Illuminating the World with Superior Quality

About us

Catalogue



Catalogue	01
Brand Story	03
Product Export	05
Core Advantage	07
Downlight	09
LED Downlight	15
LED Downlight Retrofit	19
Other Categories	25
Ceiling Light	30
Flush Mount Ceiling Light	35
LED Flat Panel	38
LED Flat Panel	43
LED Ceiling Fan	47
Ceiling Fan with Light	53
Fandelier Ceiling Fan with Light	59
Emergency Lights	61
Emergency Lights	67



Brand Story

" Illuminating the World with
Superior Quality " :

Amico is an emerging lighting-technology brand that is co-founded by a group of senior R&D experts who specialized in the LED lighting industry.

We stick to our brand value of " illuminating the world with superior quality ".

We pursue the frontier of tech-driven leadership and reliable quality in product, and provide high-quality products at reasonable prices, and deliver you with excellent support and shopping experience.



Product Export

Core Advantage

10 Years

Focus on lighting industry
for 10 years.

NO. 1

No. 1 seller on Amazon.


50 Countries

Already sold in more than 50 countries
and regions worldwide.

231 Patents

Possesses 231 patents for
self-developed lamp inventions.


Part 01 Downlight

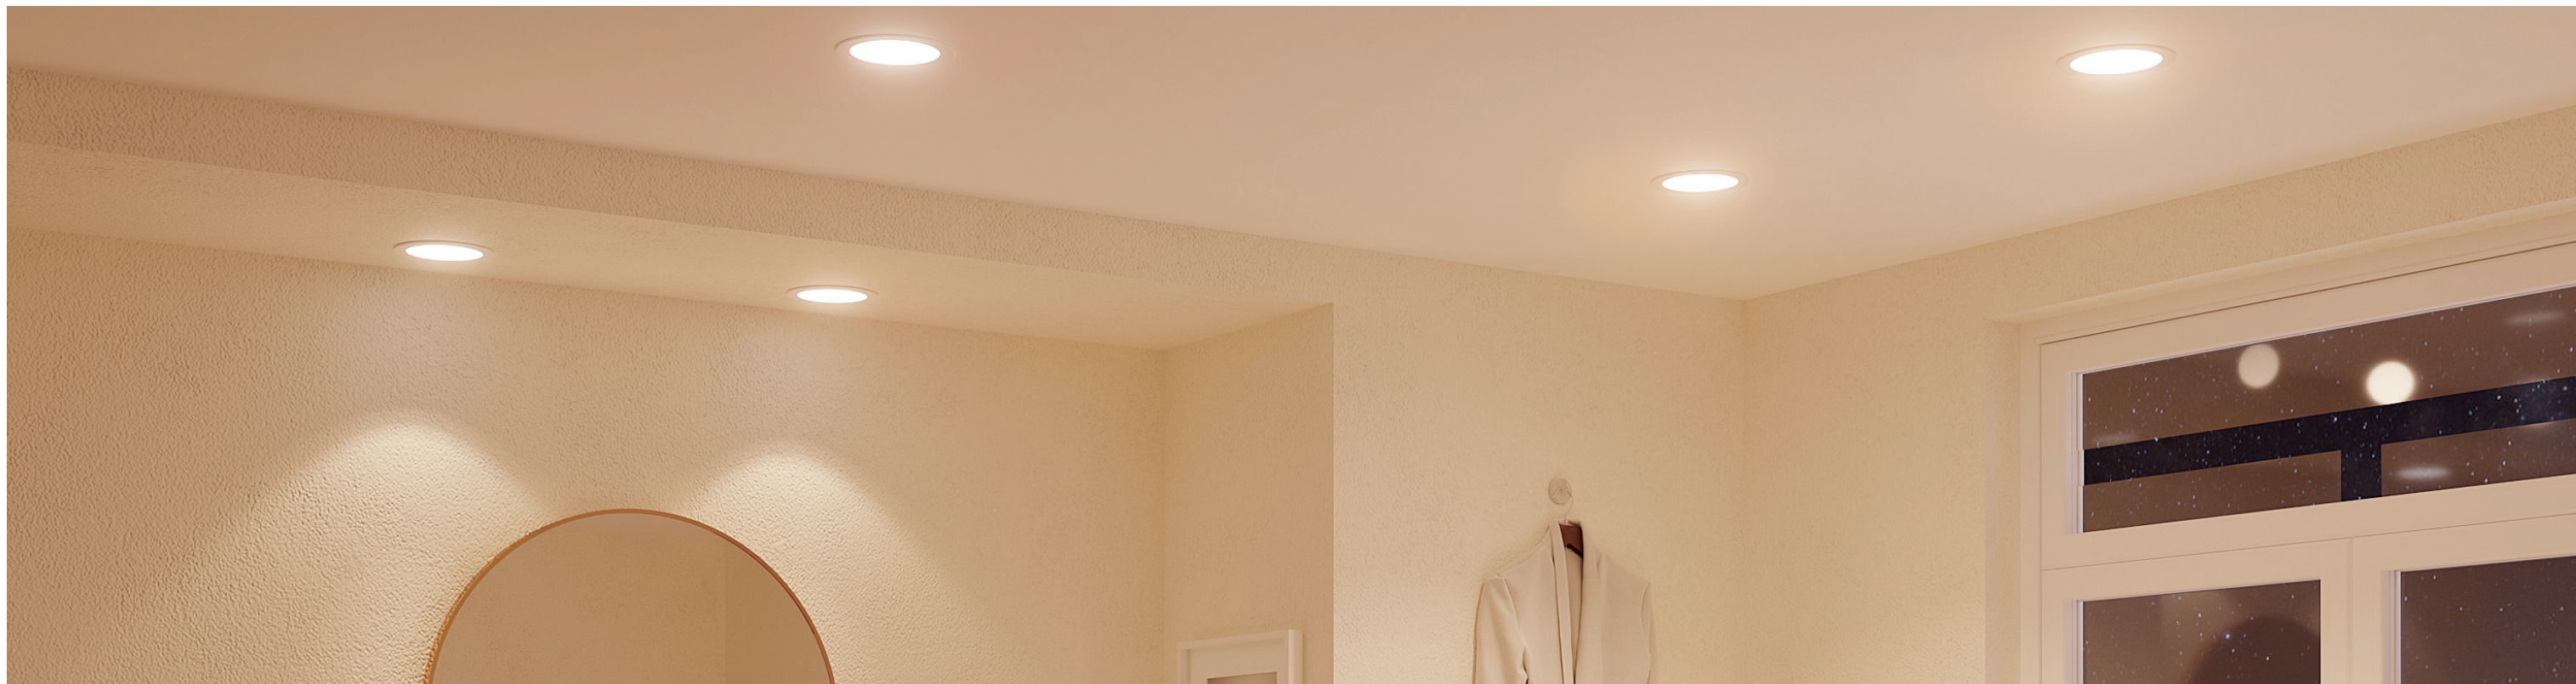

Certification & Technology



- ▶ Short time voltage resistance, short circuit protection.
- ▶ Damp location / Wet location
- ▶ Lightning protection 1KV .
- ▶ CCT
- ▶ With Google Home / alexa / FCC / ETL / and other global certification
- ▶ 1-10V / Triac dimming
- ▶ Bluetooth / Zigbee / Wi-Fi
- ▶ 5 Years Warranty
- ▶ Patent Development



2700K
Soft White




3000K
Warm White



4000K
Warm White



5000K
Cool White



6000K
Daylight

About
Our Products

Scenarios




For every scenario in your home.
Suitable for all kinds of decoration styles.



LED Slim Panel Downlight



LED Slim Panel Downlight

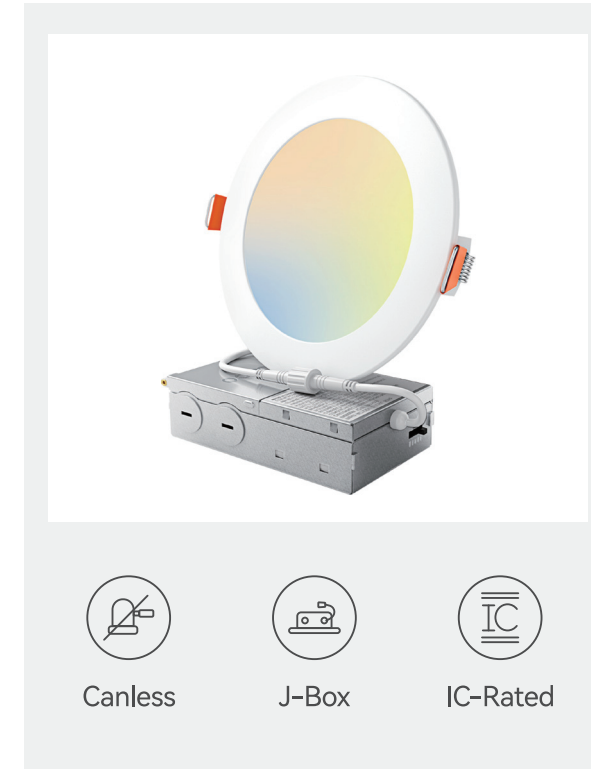

Feature:

- Thin J-Box ideal for narrow ceiling
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan


Applications:

Residential Home / Office and Retail / Hotel

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120159	3 inch	120	7	500LM	>0.9	27/30/35/40/50K	80/90	120	White/Black
A1812143	4 inch	120	10	700LM	>0.9	27/30/35/40/50K	80/90	120	White/Black
A1812034	6 inch	120	12	950LM	>0.9	27/30/35/40/50K	80/90	120	White/Black
A18120161	8 inch	120	18	1500LM	>0.9	27/30/35/40/50K	80/90	120	White/Black

LED Slim Panel with Night Light

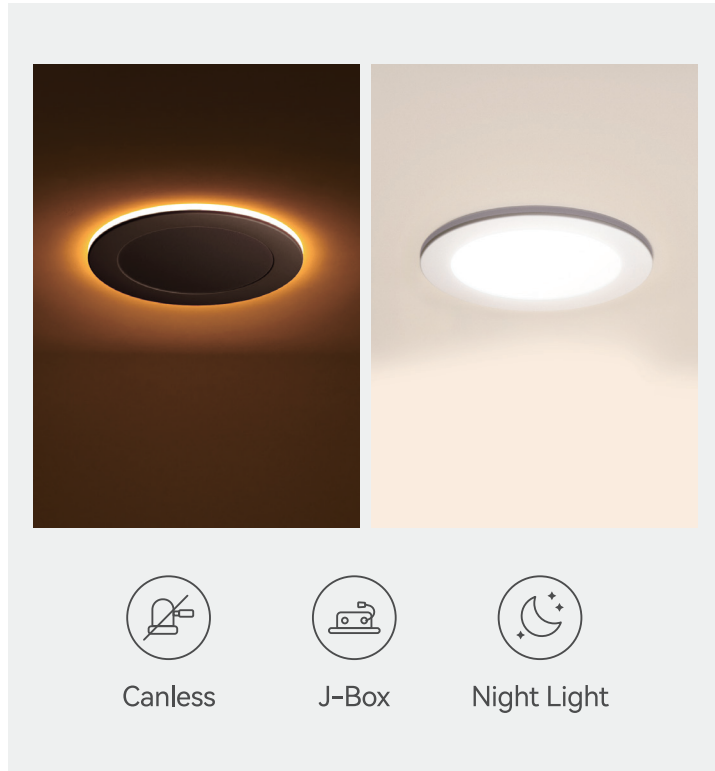


Feature:

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- Recessed can & junction box installation
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel

Smart LED Slim Panel Downlight

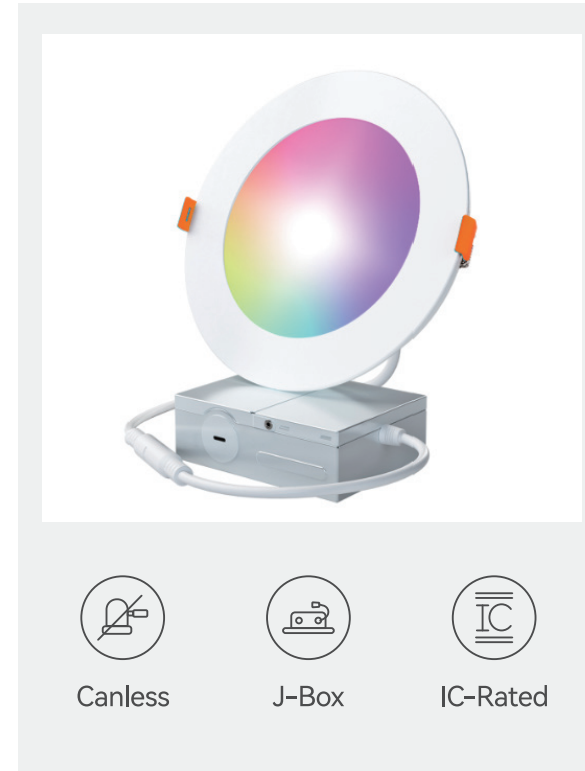

Feature:

- Work with Alexa & Google Home
- CCT: RGBCW
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18011112001	3 inch	120	7	500LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black
A18120160	4 inch	120	10	700LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black
A1812148	6 inch	120	12	950LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black
A18011112002	8 inch	120	18	1500LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18030512002	6 inch	120	12	1000LM	>0.9	RGBCW	80/90	120	White
A18030512001	4 inch	120	10	700LM	>0.9	RGBCW	80/90	120	White




LED



Downlight Retrofit

LED Downlight Retrofit

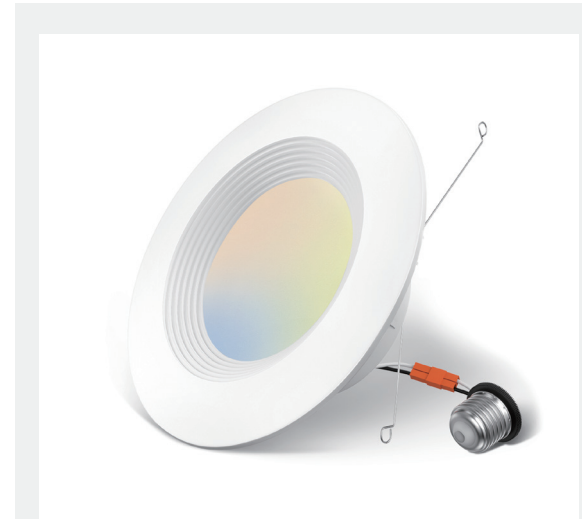

Feature:

- Baffle Trim for grooved interior creates a soft and glare-free spotlight
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel



Easy
Installation



High
Brightness




Smooth
Dimming

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18020424011	4 inch	120	7	600LM	>0.7	27/30/35/40/50K	80/90	120	White
A1824122	5/6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	80/90	120	White

LED Downlight Retrofit with Night Light

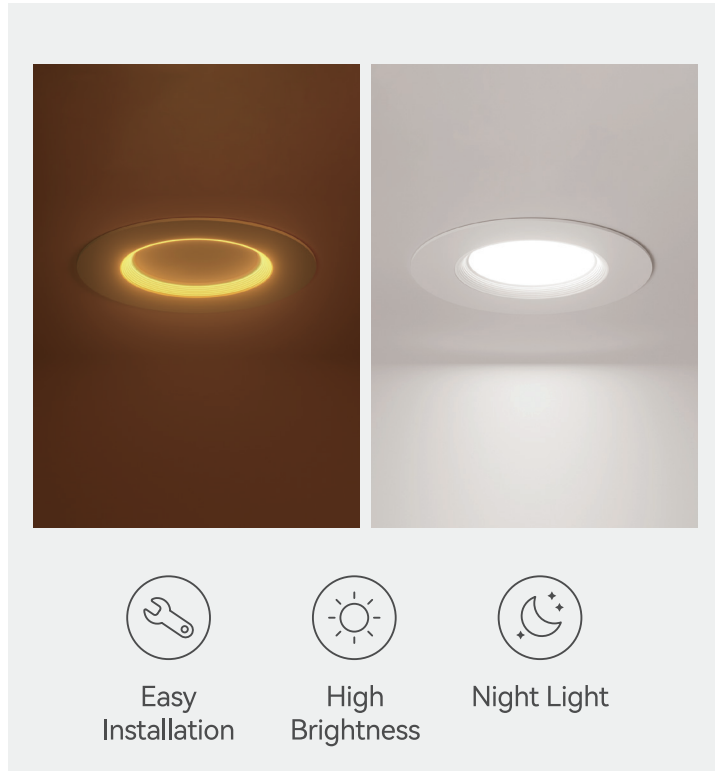

Feature:

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan


Applications:

Residential Home / Office and Retail / Hotel

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18021212001	4 inch	120	9	700LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White
A18021212003	6 inch	120	12	1050LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White

LED Ultra-Thin Recessed Downlight Retrofit

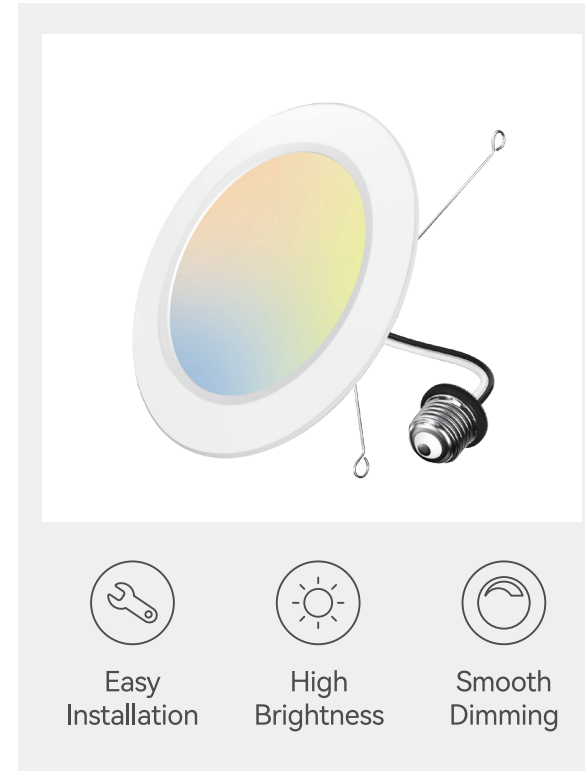

Feature:

- Ultra thin design for low profile ceiling
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan


Applications:

Residential Home / Office and Retail / Hotel

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120158	6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	80/90	120	White
A18021324002	4 inch	120	7	700LM	>0.7	27/30/35/40/50K	80/90	120	White

LED Smooth Trim Downlight Retrofit with Night Light

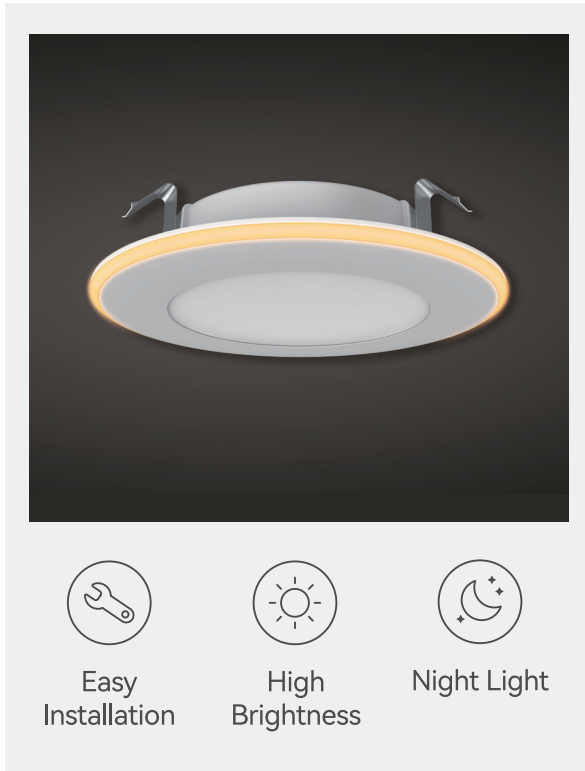

Feature:

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel



Easy Installation



High Brightness




Night Light

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18021324003	6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White
A18021324001	4 inch	120	7	700LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White

LED Downlight Retrofit with Night Light

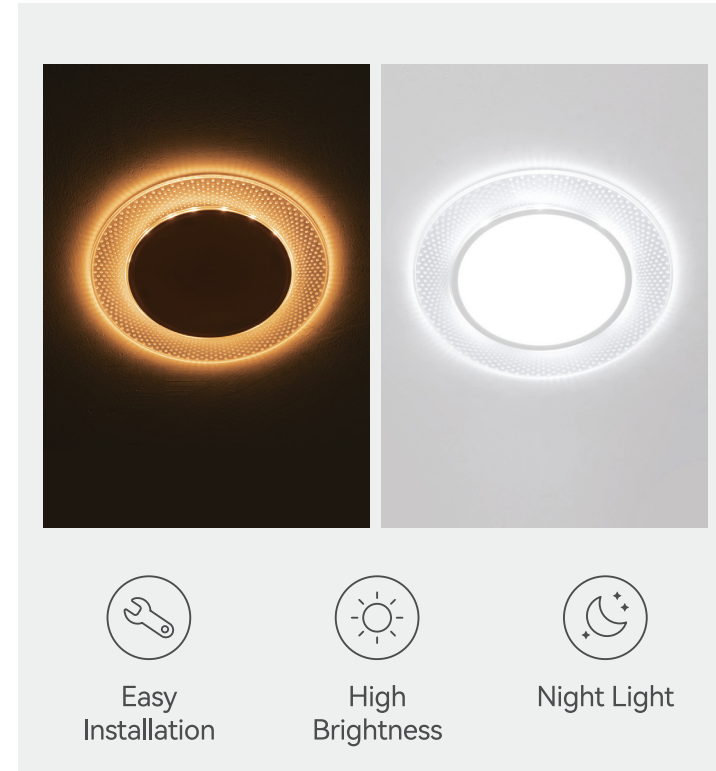

Feature:

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable ;
- Easy and Safe Installation ;
- Suitable for damp location;
- 50000 Hours Lifespan ;

Applications:

Residential Home / Office and Retail / Hotel



Easy Installation



High Brightness



Night Light


Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18020501001	6 inch	120	10	900LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White

Other Categories



LED Flush Mount Disk Light

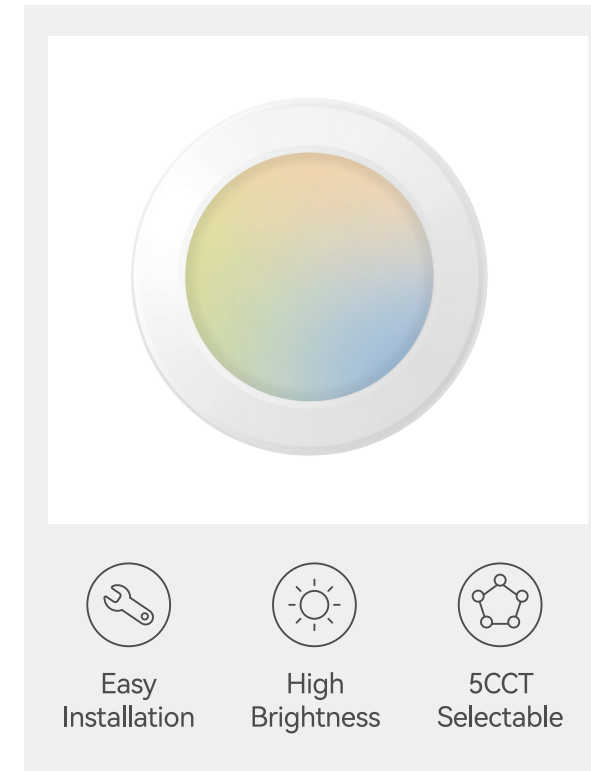

Feature:

- Ultra thin design for low profile ceiling
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- Recessed can & junction box installation
- 50000 Hours Lifespan


Applications:

Residential Home / Office and Retail / Hotel

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18240180	6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	80/90	120	White

LED Slim Panel Recessed Ceiling Light

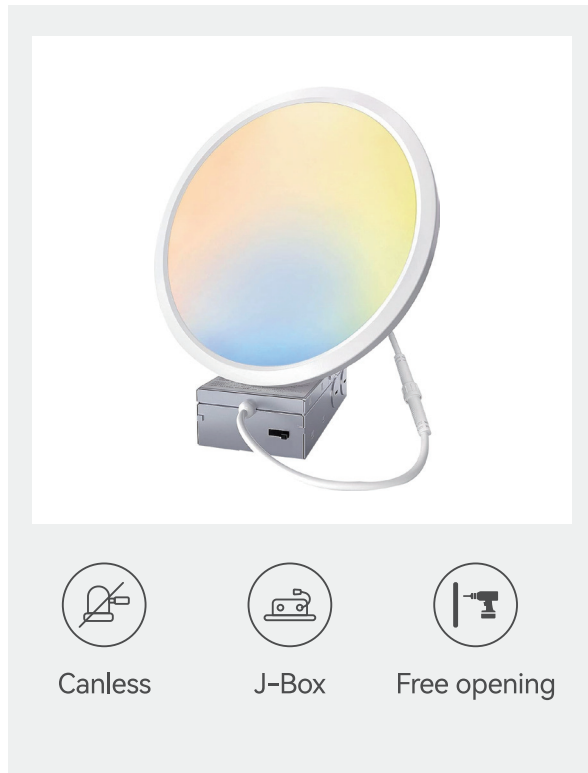

Feature:

- Ultra thin design for low profile ceiling
- Color Temperature Selectable
- Easy and Safe Installation
- 50,000 hours Lifespan
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel



Canless



J-Box




Free opening

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120174	5 inch	120	12	900LM	>0.9	27/30/35/40/50K	80/90	120	White
A1812097	7 inch	120	15	1200LM	>0.9	27/30/35/40/50K	80/90	120	White

LED Adjustable Gimbal Recessed Downlight

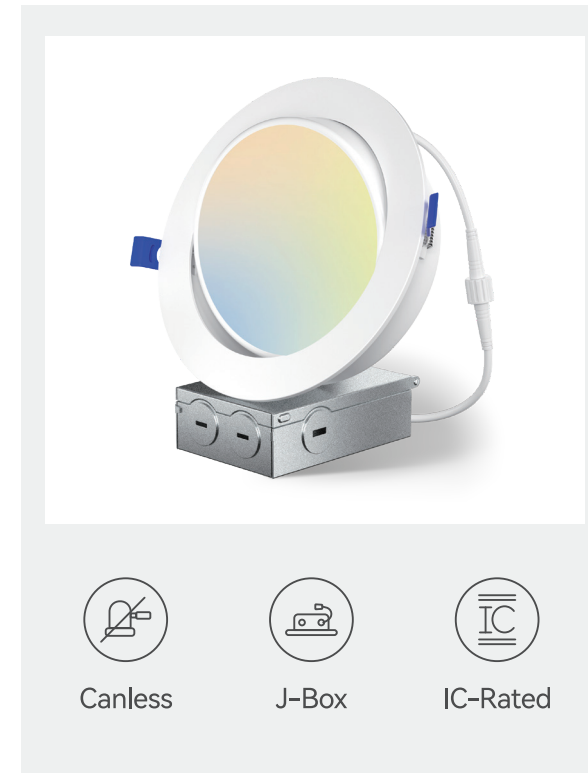

Feature:

- Ideal for sloped ceilings, wall washing, highlight artwork, task and general lighting
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel



Canless



J-Box




IC-Rated

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120175	6 inch	120	12	1000LM	>0.9	27/30/35/40/50K	80/90	120	White

LED Eyeball Recessed Downlight

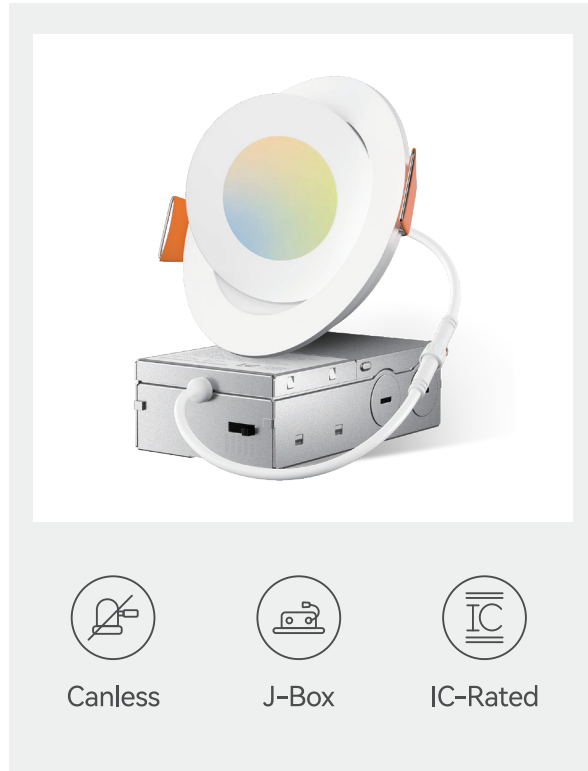

Feature:

- Ideal for sloped ceilings, wall washing, highlight artwork, task and general lighting
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan;

Applications:

Residential Home / Office and Retail / Hotel



Canless



J-Box



IC-Rated

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18021324001	4 inch	120	9	700LM	>0.7	27/30/35/40/50K	80/90	38	White

About Our Products

1 Flush Mount
Ceiling Light

Part 02 Ceiling Light



Certification & Technology



-
- ▶ Short time voltage resistance, short circuit protection.
 - ▶ Damp location / Wet location
 - ▶ Lightning protection 1KV .
 - ▶ CCT
 - ▶ With Google Home / alexa / FCC / ETL / and other global certification
 - ▶ Triac dimming
 - ▶ 2 Years Warranty
 - ▶ Patent Development



2700K
Soft White

3000K
Warm White

4000K
Warm White

5000K
Cool White

6500K
Daylight




For every scenario in your home.
Suitable for all kinds of decoration styles.



Flush Mount Ceiling Light

Double Ring LED Ceiling Light

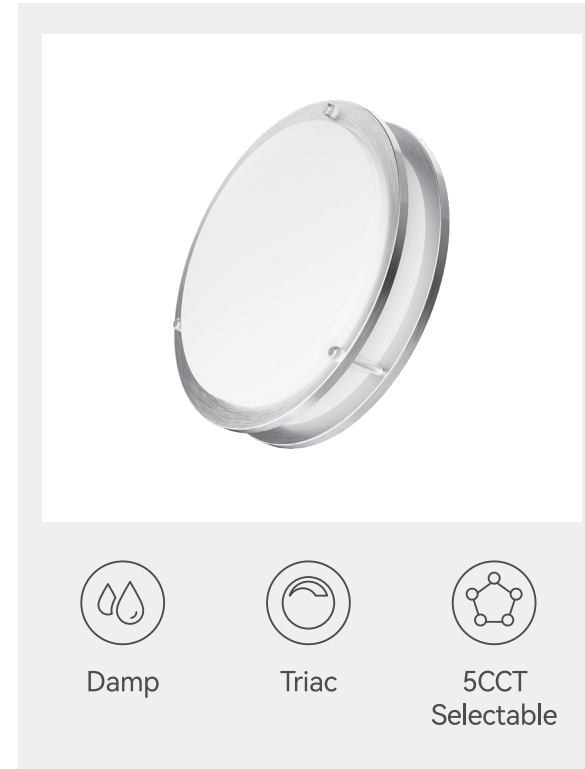

Feature:

- Allows for easy adjustment of output and color
- Multiple lights in 1 fitting, less SKU, less inventory cost
- Sensor optional for more energy saving
- Frosted polycarbonate lens
- Triac dimmable
- Brush nickel(stainless steel) finish
- Damp location suitable
- Easy installation

Applications:

Residential Home / Office and Retail / Hotel



Damp



Triac



5CCT
Selectable

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A2502020	10 inch	120	16	1200LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502021	12 inch	120	20	1600LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502022	14 inch	120	24	2000LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502023	16 inch	120	28	2400LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502024	18 inch	120	34	2800LM	>0.7	27/30/35/40/50K	80	110	Nickel

Slim Panel Ceiling Light



Feature:

- Allows for easy adjustment of output and color
- Frosted polycarbonate lens
- Triac dimmable
- Damp location suitable
- Easy installation
- Modern design



Damp



Triac



5CCT Selectable

Applications:

Residential Home / Office and Retail / Hotel

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A2502025	12 inch	120	24	1800LM	>0.7	27/30/35/40/50K	80/90	120	Nickel

About Our Products

Part 03 LED Flat Panel



Certification & Technology



- ▶ High Efficiency Isolated Constant Current Driver
- ▶ Damp location
- ▶ FCC / ETL / DLC / and other global certification
- ▶ 120-277V / 120-347V input voltage range
- ▶ Lightning protection 2KV .
- ▶ 3 CCT & 3 LUMEN SELECTABLE
- ▶ 5 Years Warranty
- ▶ 0-10V dimming / Triac dimming



4000K
Warm White




5000K
Daylight



6500K
Cool Daylight



Scenarios

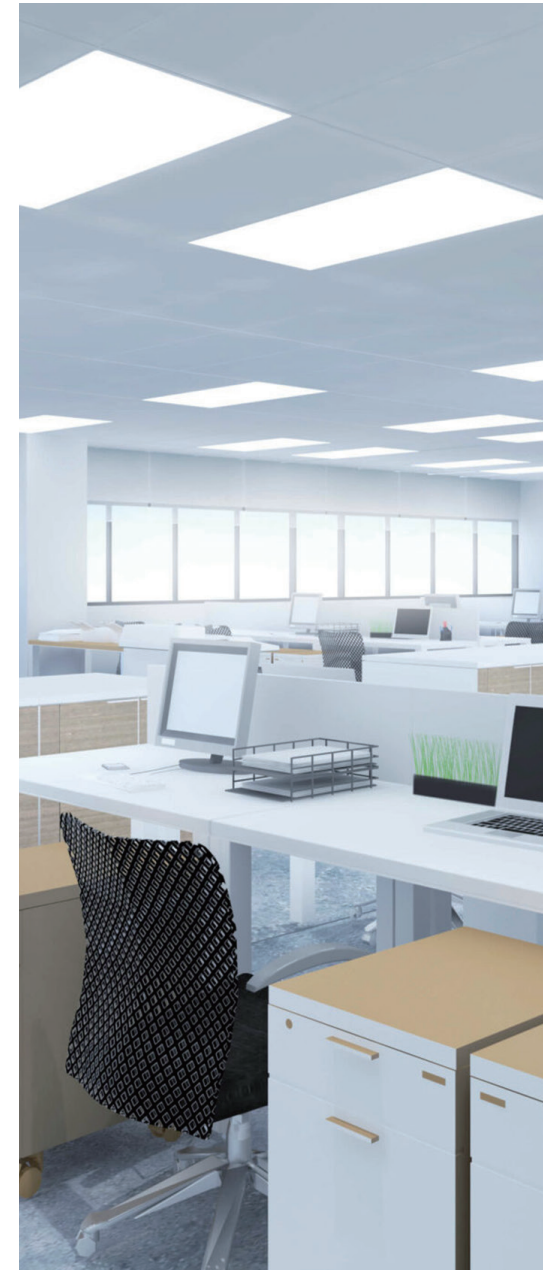

Suitable for a wide range of use scenarios.
Suitable for all kinds of decoration styles.

LED Flat Panel

2x4FT LED Flat Panel light



Feature:

- Back-lit emitting, Ultra slim design, light weight
- Meet DLC 5.1 standard and premium version
- 3CCT and 3 wattages selectable
- 0-10V Dimming
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Office and conference rooms / Supermarkets / Hospital and shops etc.



Easy
Installation



Damp



3CCT
Selectable

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle
A22061467	2x4FT	120-277V or 120-347V	30-35-45	3600/4200/5500LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120
A06100106001	2x4FT	120-277V or 120-347V	34-45-50	4250/5400/6250LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120
A06100106003	2x4FT	120-277V or 120-347V	40-50-60	4500/6000/7500LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120

2x2FT LED Flat Panel light



Feature:

- Back-lit emitting, Ultra slim design, light weight
- Meet DLC 5.1 standard and premium version
- 3CCT and 3 wattages selectable
- 0-10V Dimming
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Office and conference rooms / Supermarkets / Hospital and shops etc.



Easy Installation



Damp



3CCT Selectable

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle
A22061466	2x2FT	120-277V or 120-347V	20-30-35	2400/3300/4200LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120

1x4FT Surface Mount LED Flat Panel Light



Feature:

- Ultra thin design for surface mount
- 3CCT and 3 wattages selectable
- TRIAC 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

Applications:

Residential Home / Office and Retail / Hotel



Easy Installation



High Brightness




Smooth Dimming

Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle
A06100202001	1x4FT	120	30-40-50	3750/4800/5750LM	>0.9	3500K/4000K/5000K	80	120

Part 04

LED Ceiling Fan

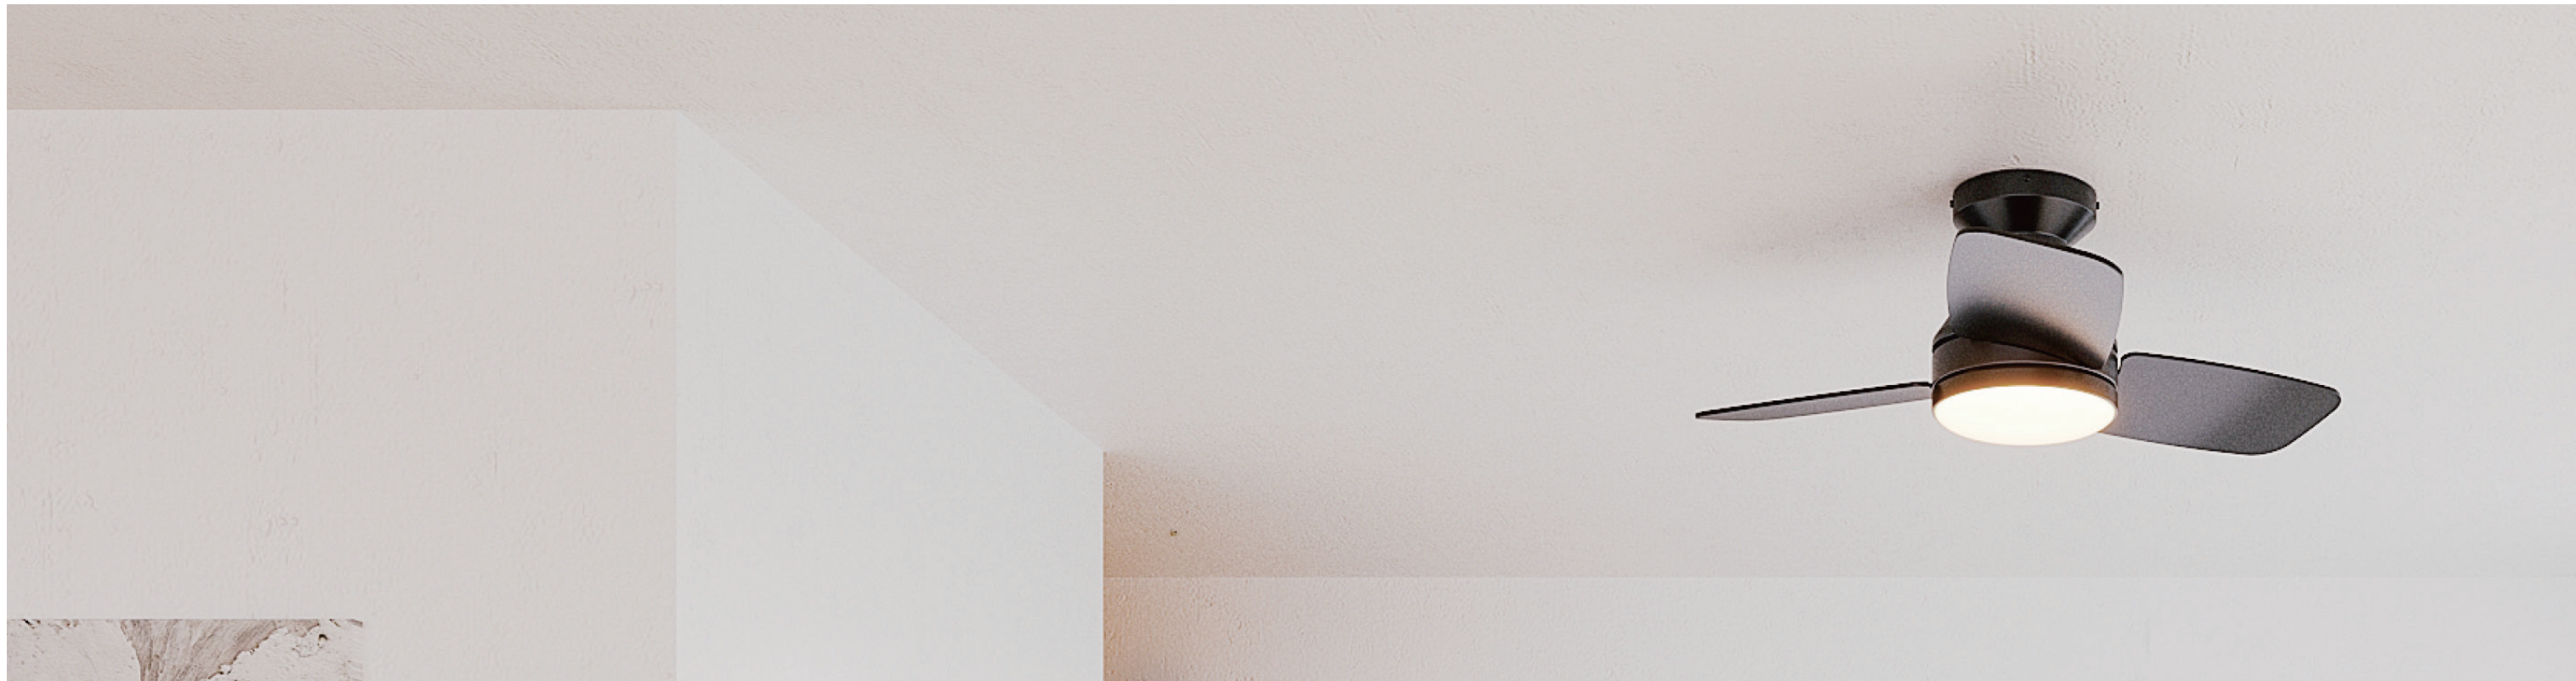

Certification & Technology




- ▶ Ceiling Fans with Remote
- ▶ Low Profile Flush Mount
- ▶ 10-100% Dimmable
- ▶ Noise-free Experience
- ▶ With Google Home / alexa / FCC / ETL / and other global certification
- ▶ Reversible DC Motor
- ▶ Bluetooth / Zigbee / Wi-Fi
- ▶ Patent Development




30"



42"



52"



66"



72"




For every scenario in your home.
Suitable for all kinds of decoration styles.



Ceiling Fan with Light

Ceiling Fan with light

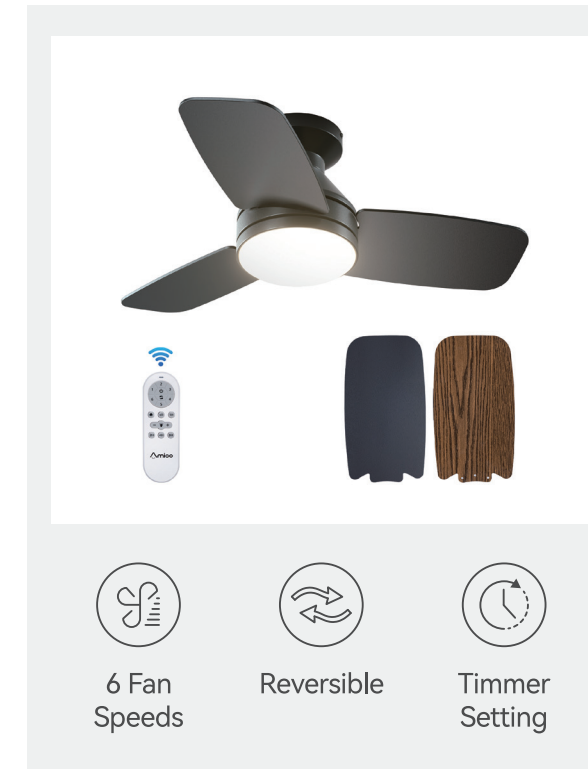

Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor
2 years warranty for other parts

Applications:

Kitchen / Bedroom / LivingRoom
/ Study Room / DiningRoom



6 Fan
Speeds



Reversible




Timmer
Setting

Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
KFM30PLY01R1	30 inch	120	20+18	2087	1500LM	Plywood	3000K / 4000K / 6000K	3	Black
KFM30PLY02R1	30 inch	120	20+18	2087	1500LM	Plywood	3000K / 4000K / 6000K	3	White
KFM30PLY03R1	30 inch	120	20+18	2087	1500LM	Plywood	3000K / 4000K / 6000K	3	Nickel

Ceiling Fan with light

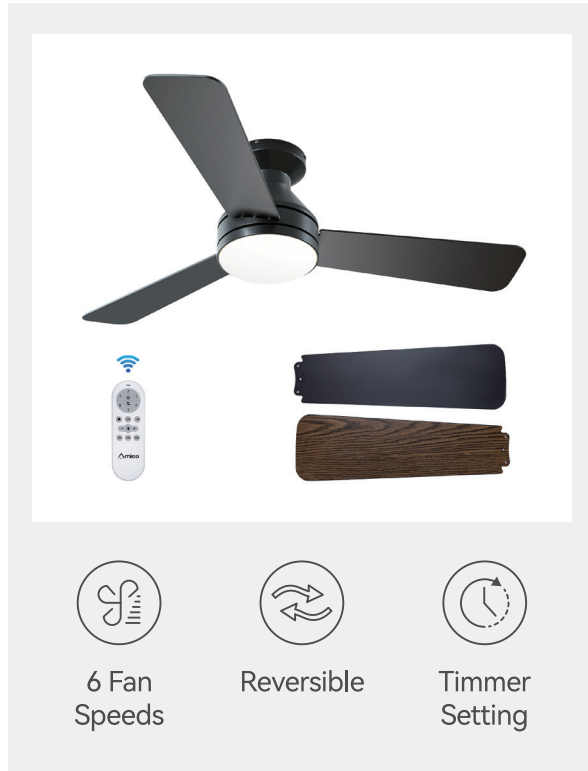

Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor
- 2 years warranty for other parts

Applications:


Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom



Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
KFM42PLY01R1	42 inch	120	20+18	3326	1500LM	Plywood	3000K / 4000K / 6000K	3	Black
KFM42PLY02R1	42 inch	120	20+18	3326	1500LM	Plywood	3000K / 4000K / 6000K	3	White
KFM42PLY03R1	42 inch	120	20+18	3326	1500LM	Plywood	3000K / 4000K / 6000K	3	Nickel

Ceiling Fan with light

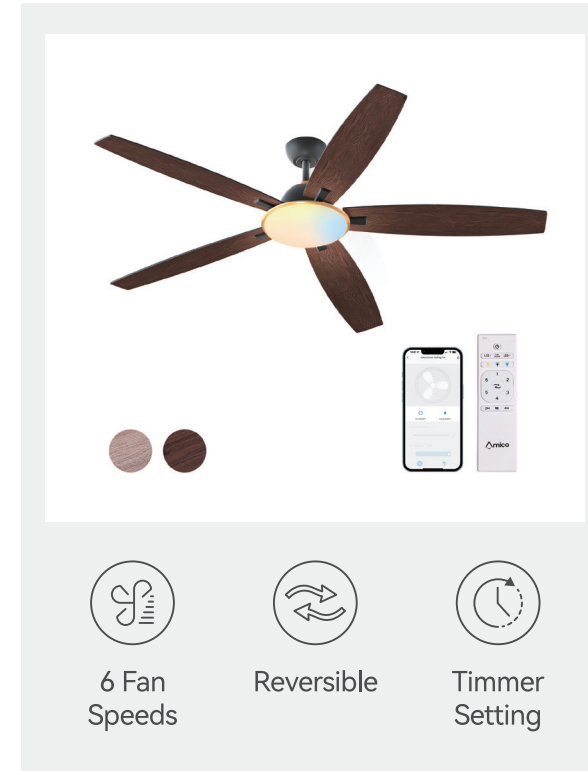


Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor
- 2 years warranty for other parts

Applications:


Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom

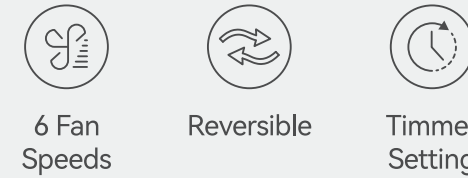

Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
A0505AX0101001	52 inch	120	20+24	2974	2000LM	Plywood	3000K / 4000K / 6000K	5	Black

Ceiling Fan with light

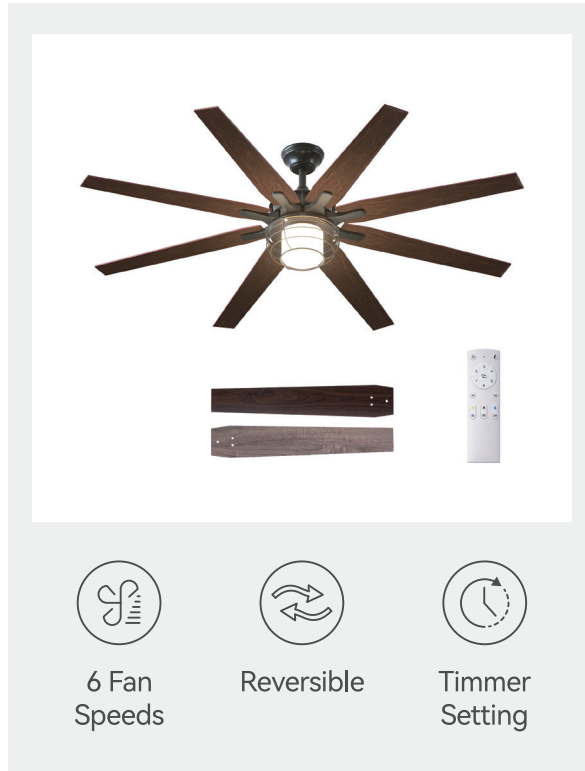

Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor
2 years warranty for other parts

Applications:

Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom



6 Fan Speeds



Reversible




Timmer Setting

Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
8BCFWL66in	66 inch	120	39+20	6403	1500LM	Plywood	3000K / 4000K / 6000K	8	Black

Ceiling Fan with light

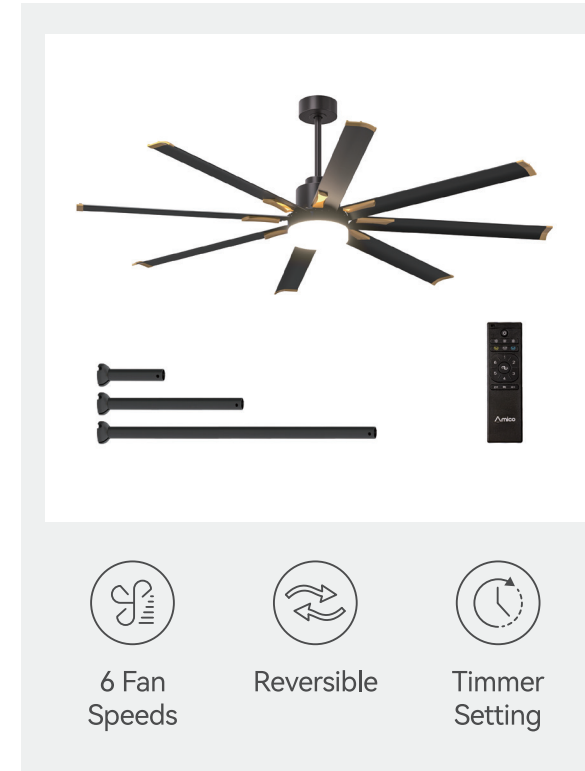

Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor
2 years warranty for other parts

Applications:

Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom / Patio



6 Fan Speeds




Reversible



Timmer Setting

Technical Data


Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
72in8BCFWLABG	72 inch	120	41+24	8370	2000LM	Aluminum alloy	3000K / 4000K / 6000K	8	Black

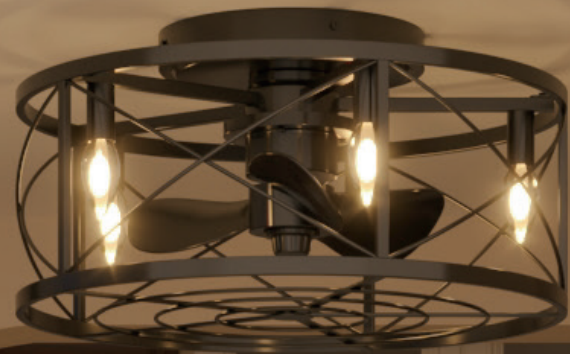

Fandelier Ceiling Fan with Light



Fandelier Ceiling Fan with Light

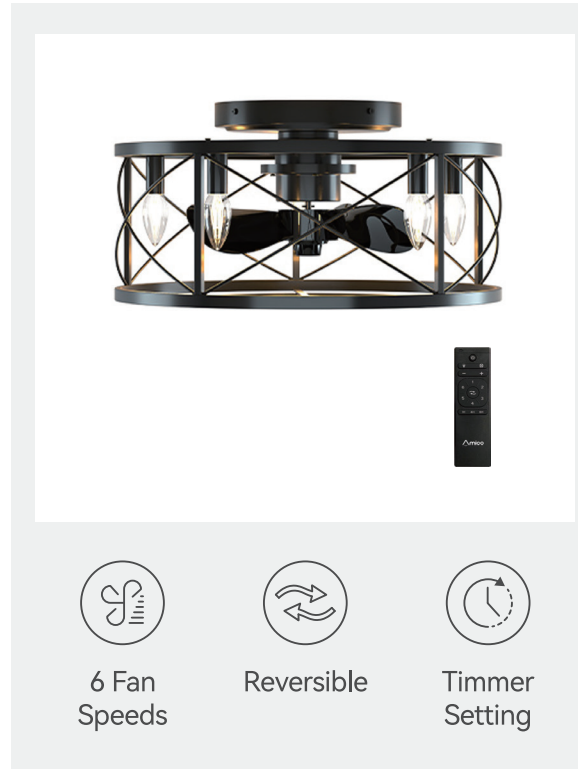

Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor
2 years warranty for other parts

Applications:

Kitchen / Bedroom / LivingRoom
/ Study Room / DiningRoom



6 Fan
Speeds



Reversible



Timmer
Setting

Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
20inBLCFWLCAGE	20 inch	120	27*5*4	2300	1800LM	ABS	3000K	3	Black

Part 05 Emergency Lights



Certification & Technology



-
- ▶ Innovative, easy installation in minutes
 - ▶ Universal J-box mounting pattern
 - ▶ 120-277VAC Dual Voltage operation
 - ▶ Maximum 24 Hours for full recharge time
 - ▶ Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
 - ▶ Test Switch and charge indicator
 - ▶ UL and cULus Listed
 - ▶ 0°C to 40°C indoor damp location listed



Scenarios



Suitable for a wide range of use scenarios.
Suitable for all kinds of decoration styles.



Emergency Lights



Commercial Lighted Exit Signs



Feature:

- Innovative, easy installation in minutes
- Red lettering can be switched to Green
- SALIDA faceplate available
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2x1W 2835 SMT LED lamp heads for emergency mode
- Built-in 3.6V 1000mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A2102004	418*184*52mm	120-277V	2*1W	90 min	6500K	ABS	White

Commercial Lighted Exit Signs



Feature:

- Innovative, easy installation in minutes
- Red lettering can be switched to Green
- SALIDA faceplate available
- Single or double face(Universal)
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 1.2V 1000mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06060017	295*182*46mm	120-277V	1W	90 min	Red / Green	ABS	White

Commercial Lighted Exit Signs



Feature:

- Innovative, easy installation in minutes
- Ultra thin Exit sign and Combo
- Letters 6 height with 3/4 stroke
- Single or double face(Universal)
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 3.6V 1000mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed
- Ultra bright RED LED

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06060015L	430*193*46mm	120-277V	2*1W	90 min	6500K	ABS	White

Commercial Lighted Exit Signs



Feature:

- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- Optional RED letters
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 3.6V 500mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010201001	320*205*65mm	120-277V	2*1W	90 min	6500K	ABS	White

Commercial Lighted Exit Signs



Feature:

- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- Optional RED letters
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 3.6V 1200mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010201003	320*339*65mm	120-277V	2*1W	90 min	6500K	ABS	White

Commercial Emergency Light Fixtures



Feature:

- Innovative, easy installation in minutes
- Suitable for wall applications
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Maximum 24 Hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A2104002	280*110*67mmC	120-277V	2*3WC	90 min	6500K	ABS	White

Commercial Emergency Light Fixtures



Feature:

- Innovative, easy installation in minutes
- Suitable for wall applications
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Maximum 24 Hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010101003	349*95*89mm	120-277V	2*3W	90 min	6500K	ABS	White

Commercial Emergency Light Fixtures



Feature:

- Innovative, easy installation in minutes
- Suitable for wall applications
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Maximum 24 Hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2X12pcs Super bright 2835 0.5W LED lamp heads for emergency mode, provide more than 400Lm output
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010101001	312*133*106mm	120-277V	2*6W	90 min	6500K	ABS	White