



FABER

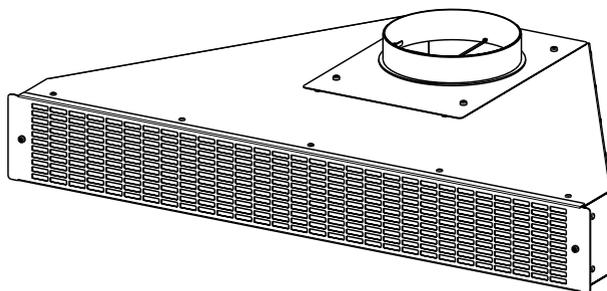



DUCTSCIR

RECIRCULATION KIT DOWNDRAFT



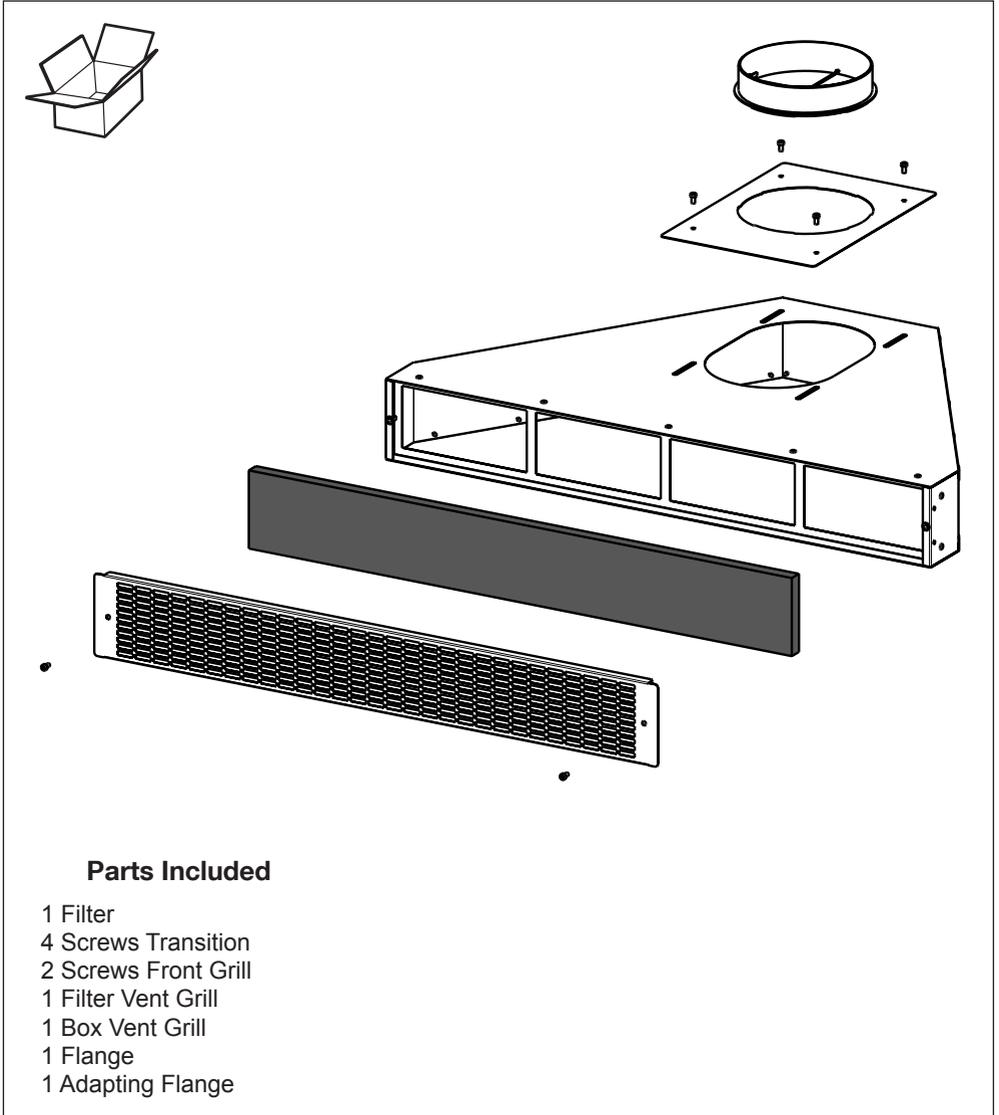


Parts needed


- 6" Ducting.
- 4 each. - Attachment screws for frame.
- 1 tube of caulk.

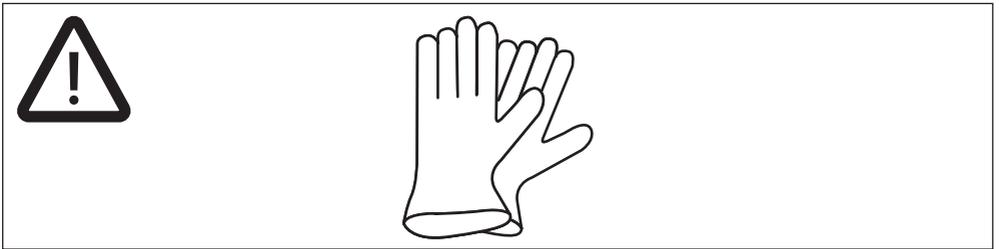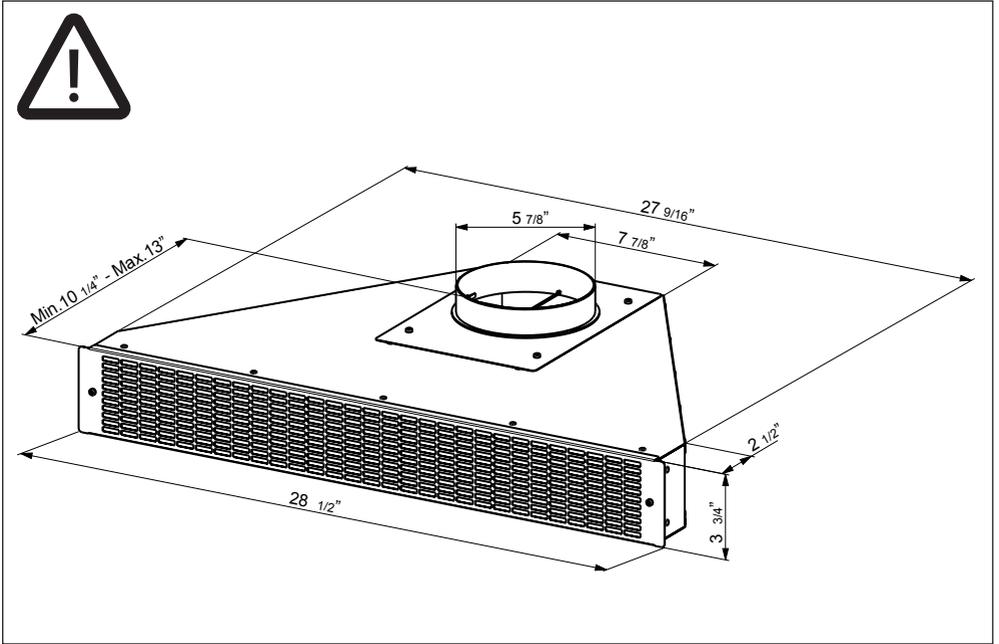




1

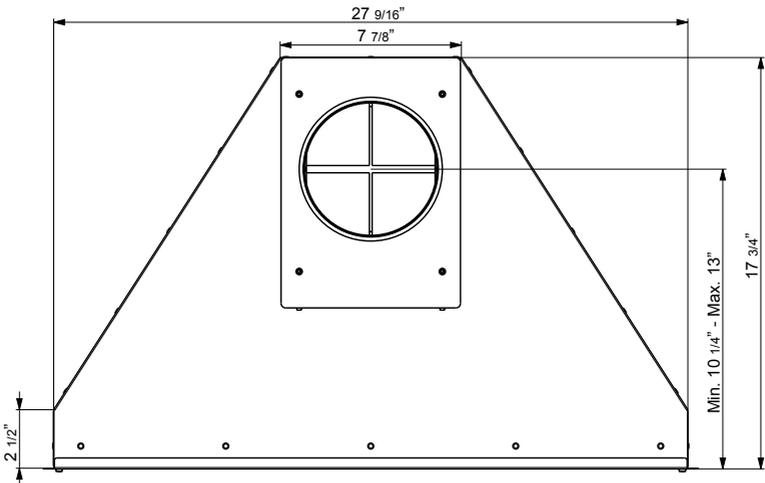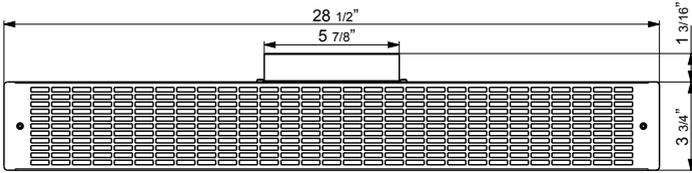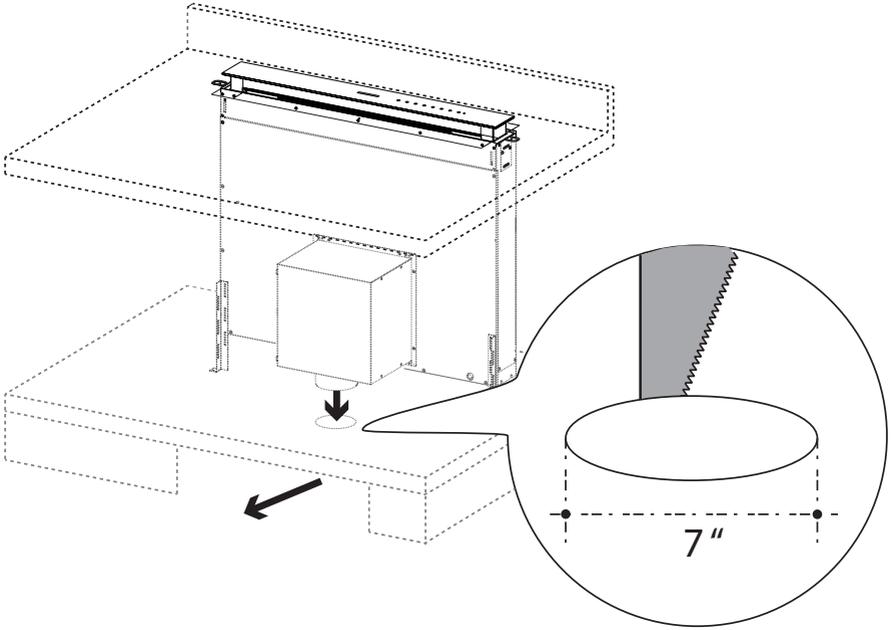


2

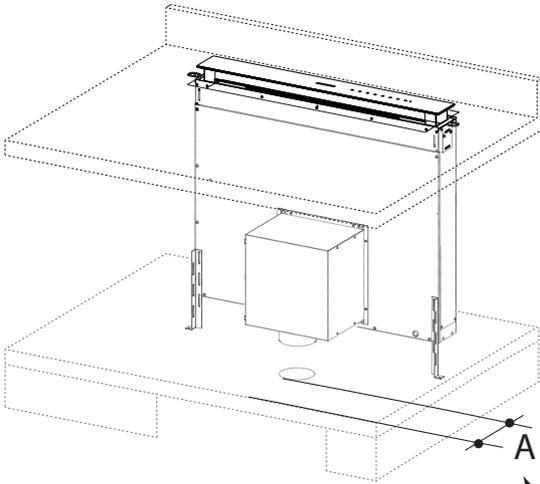



Measure the distance **A** from the hole to the cabinet external part, included the thickness of the cabinet.

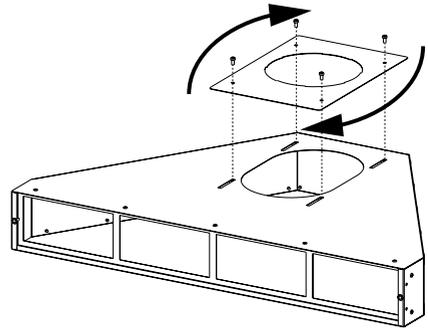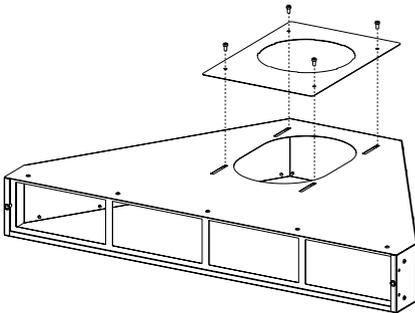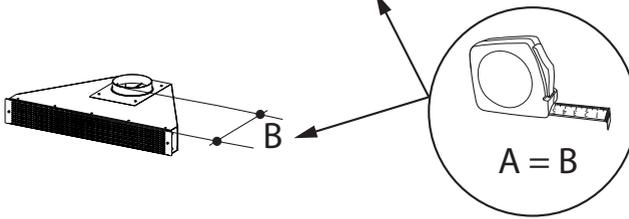



It is possible to slightly rotate or shift the final position of the flange. See figures on the right.

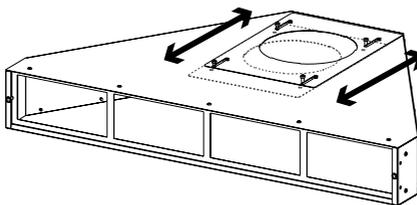



3a

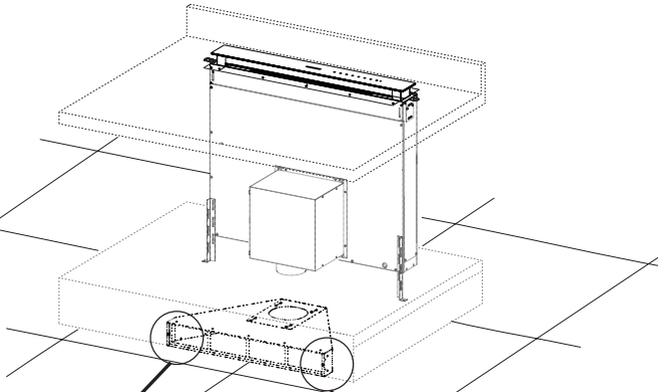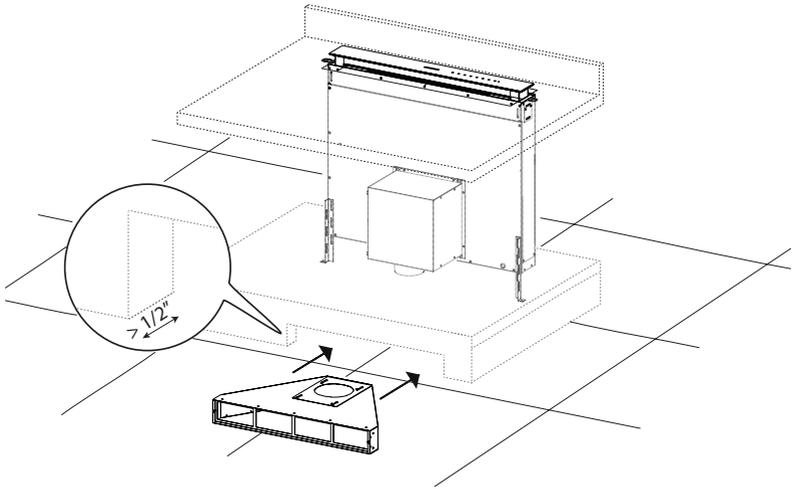


These fasteners are not provided. 4 each install screws shown in figure to the right will vary depending on your situation.







3b

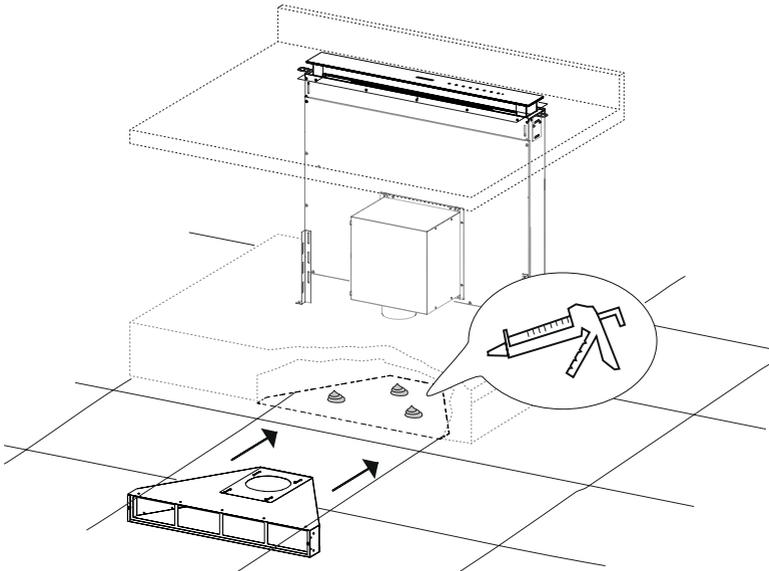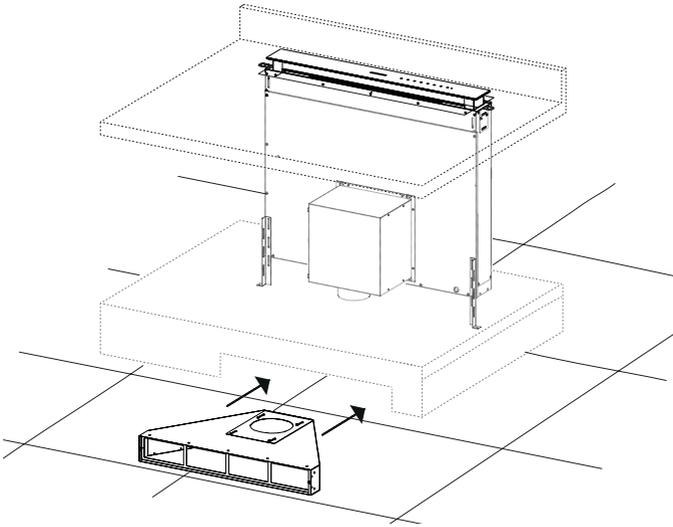

4

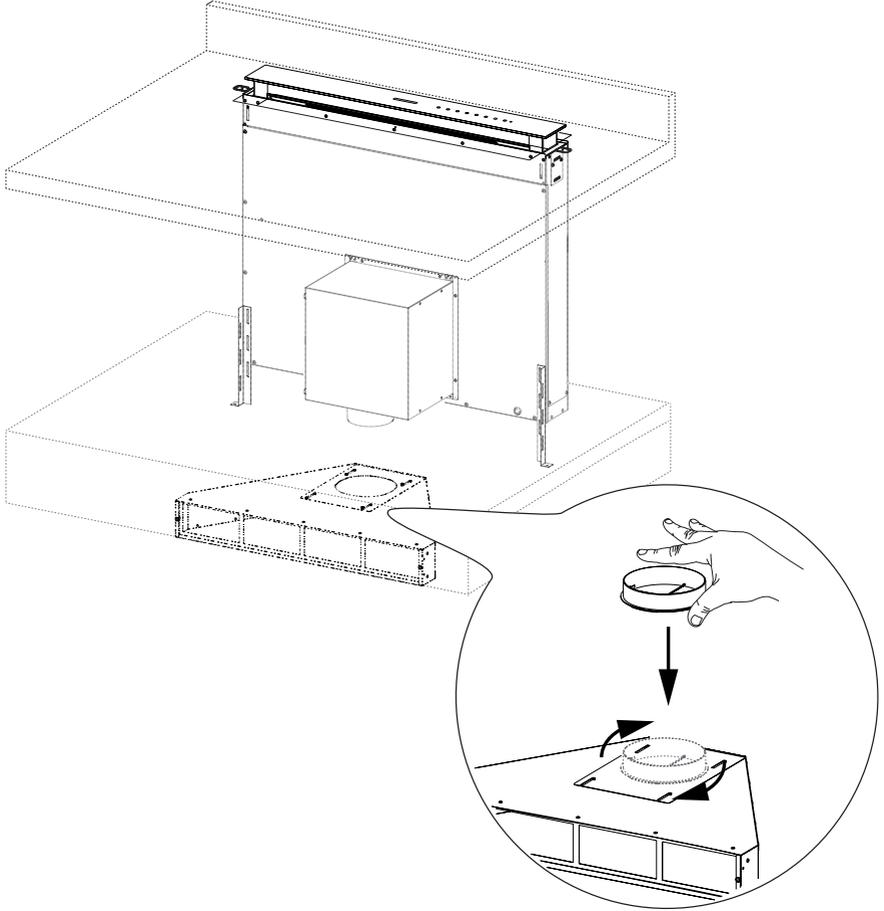

5

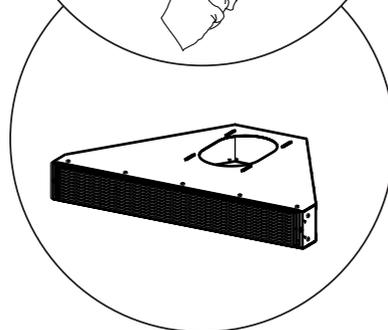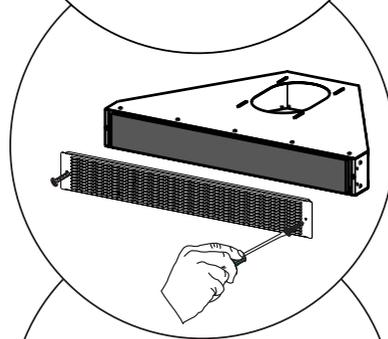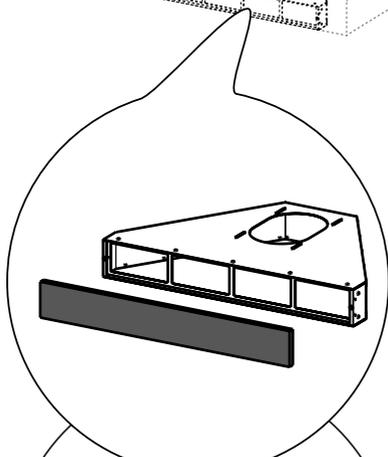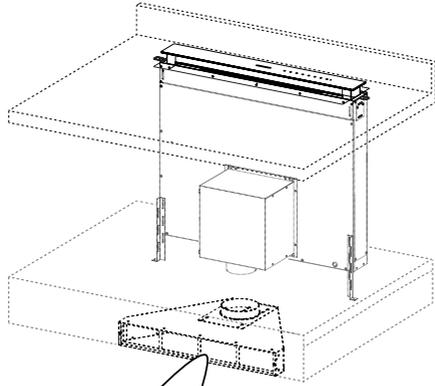

6

